

KARNAK

ELASTO-KOTE

Liquid Applied Elastomeric Thermo-Plastic
Waterproofing System
Brush, Roller or Spray Applied

Karnak Elasto-Kote is an SEB / SEBS thermoplastic waterproofing system designed specifically for application onto pitched roofs and ideal for metal, coated metal*, concrete and asbestos surfaces. Highly solar reflective and FM approved, Elasto-Kote offers an exceptionally high performance waterproof elastomeric system.

**METAL ROOFS
INCLUDING
PRE-COATED***



**PITCHED
METAL,
CONCRETE,
ASBESTOS**



ELASTO-KOTE



*please check with LRS



Elasto Kote is a single component self-priming SEBS elastomeric Thermoplastic which is applied in 2 coats and comes with a 10-year product guarantee as standard. LRS are the UK distributors of KARNAK CORPORATION roofing products. Both companies have a long-established history of manufacturing and distributing exceptional waterproofing systems.

Elasto-Kote is a highly elastic waterproof roofing system specifically designed for the overcoating of old EPDM, TPO, Metal, Spray Foam and concrete roofs with the added benefit of exceptional solar and heat reflective properties.

SEBS Rubber


SEBS thermoplastic elastomers high thermal stability and excellent weathering resistance, without sacrificing mechanical performance, flexibility or elongation. Elasto Kote has a self-priming base coat which ensures exceptional adhesion to old EPDM Rubber, TPO and Concrete, along with rust inhibitors designed for application onto old metal roofs.

FM Approval

Having been used extensively in the USA Elasto Kote comes with full FM approval along with Energy Star and Cool Roof Rating Council certification offering a 10 year guarantee and exceptional solar reflection properties thus reducing the effects of the buildings thermal transition

Applications

Elasto Kote is resistant to ponding and as such is ideal for both flat roofs and pitched roofs. The product can be applied above 5 degrees normally cures within 4 hours and can be shower proof in 30 minutes* depending on conditions. Suitable for application using brush, roller or with the use of an airless sprayer the application of Elasto Kote is both fast and simple. Application and technical data sheets are available on our website WWW.LRS-SYSTEMS.CO.UK

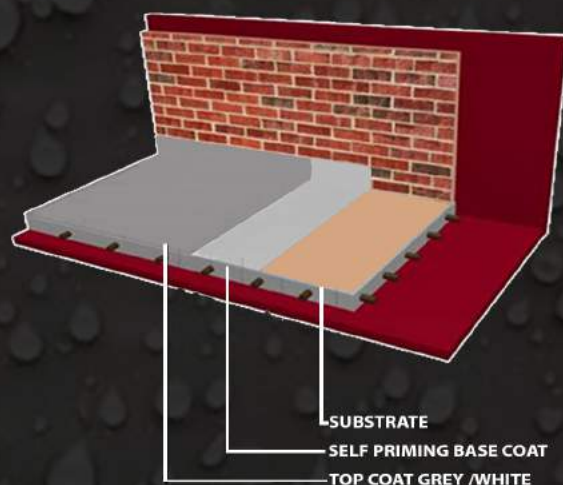

Key Features

- Self-Priming
- Single Component
- 2 Coat application
- No fleece required
- 650% Elongation
- 85% Solar reflection
- 10-year guarantee
- Brush roller or spray applied

Colours Available

- White
- Light Grey

FOR A FULL RANGE OF OUR PRODUCTS

CONTACT OUR TECHNICAL TEAM ON 01948 841 877

VISIT WWW.LRS-SYSTEMS.CO.UK

